





**WOLONG**  
*P*

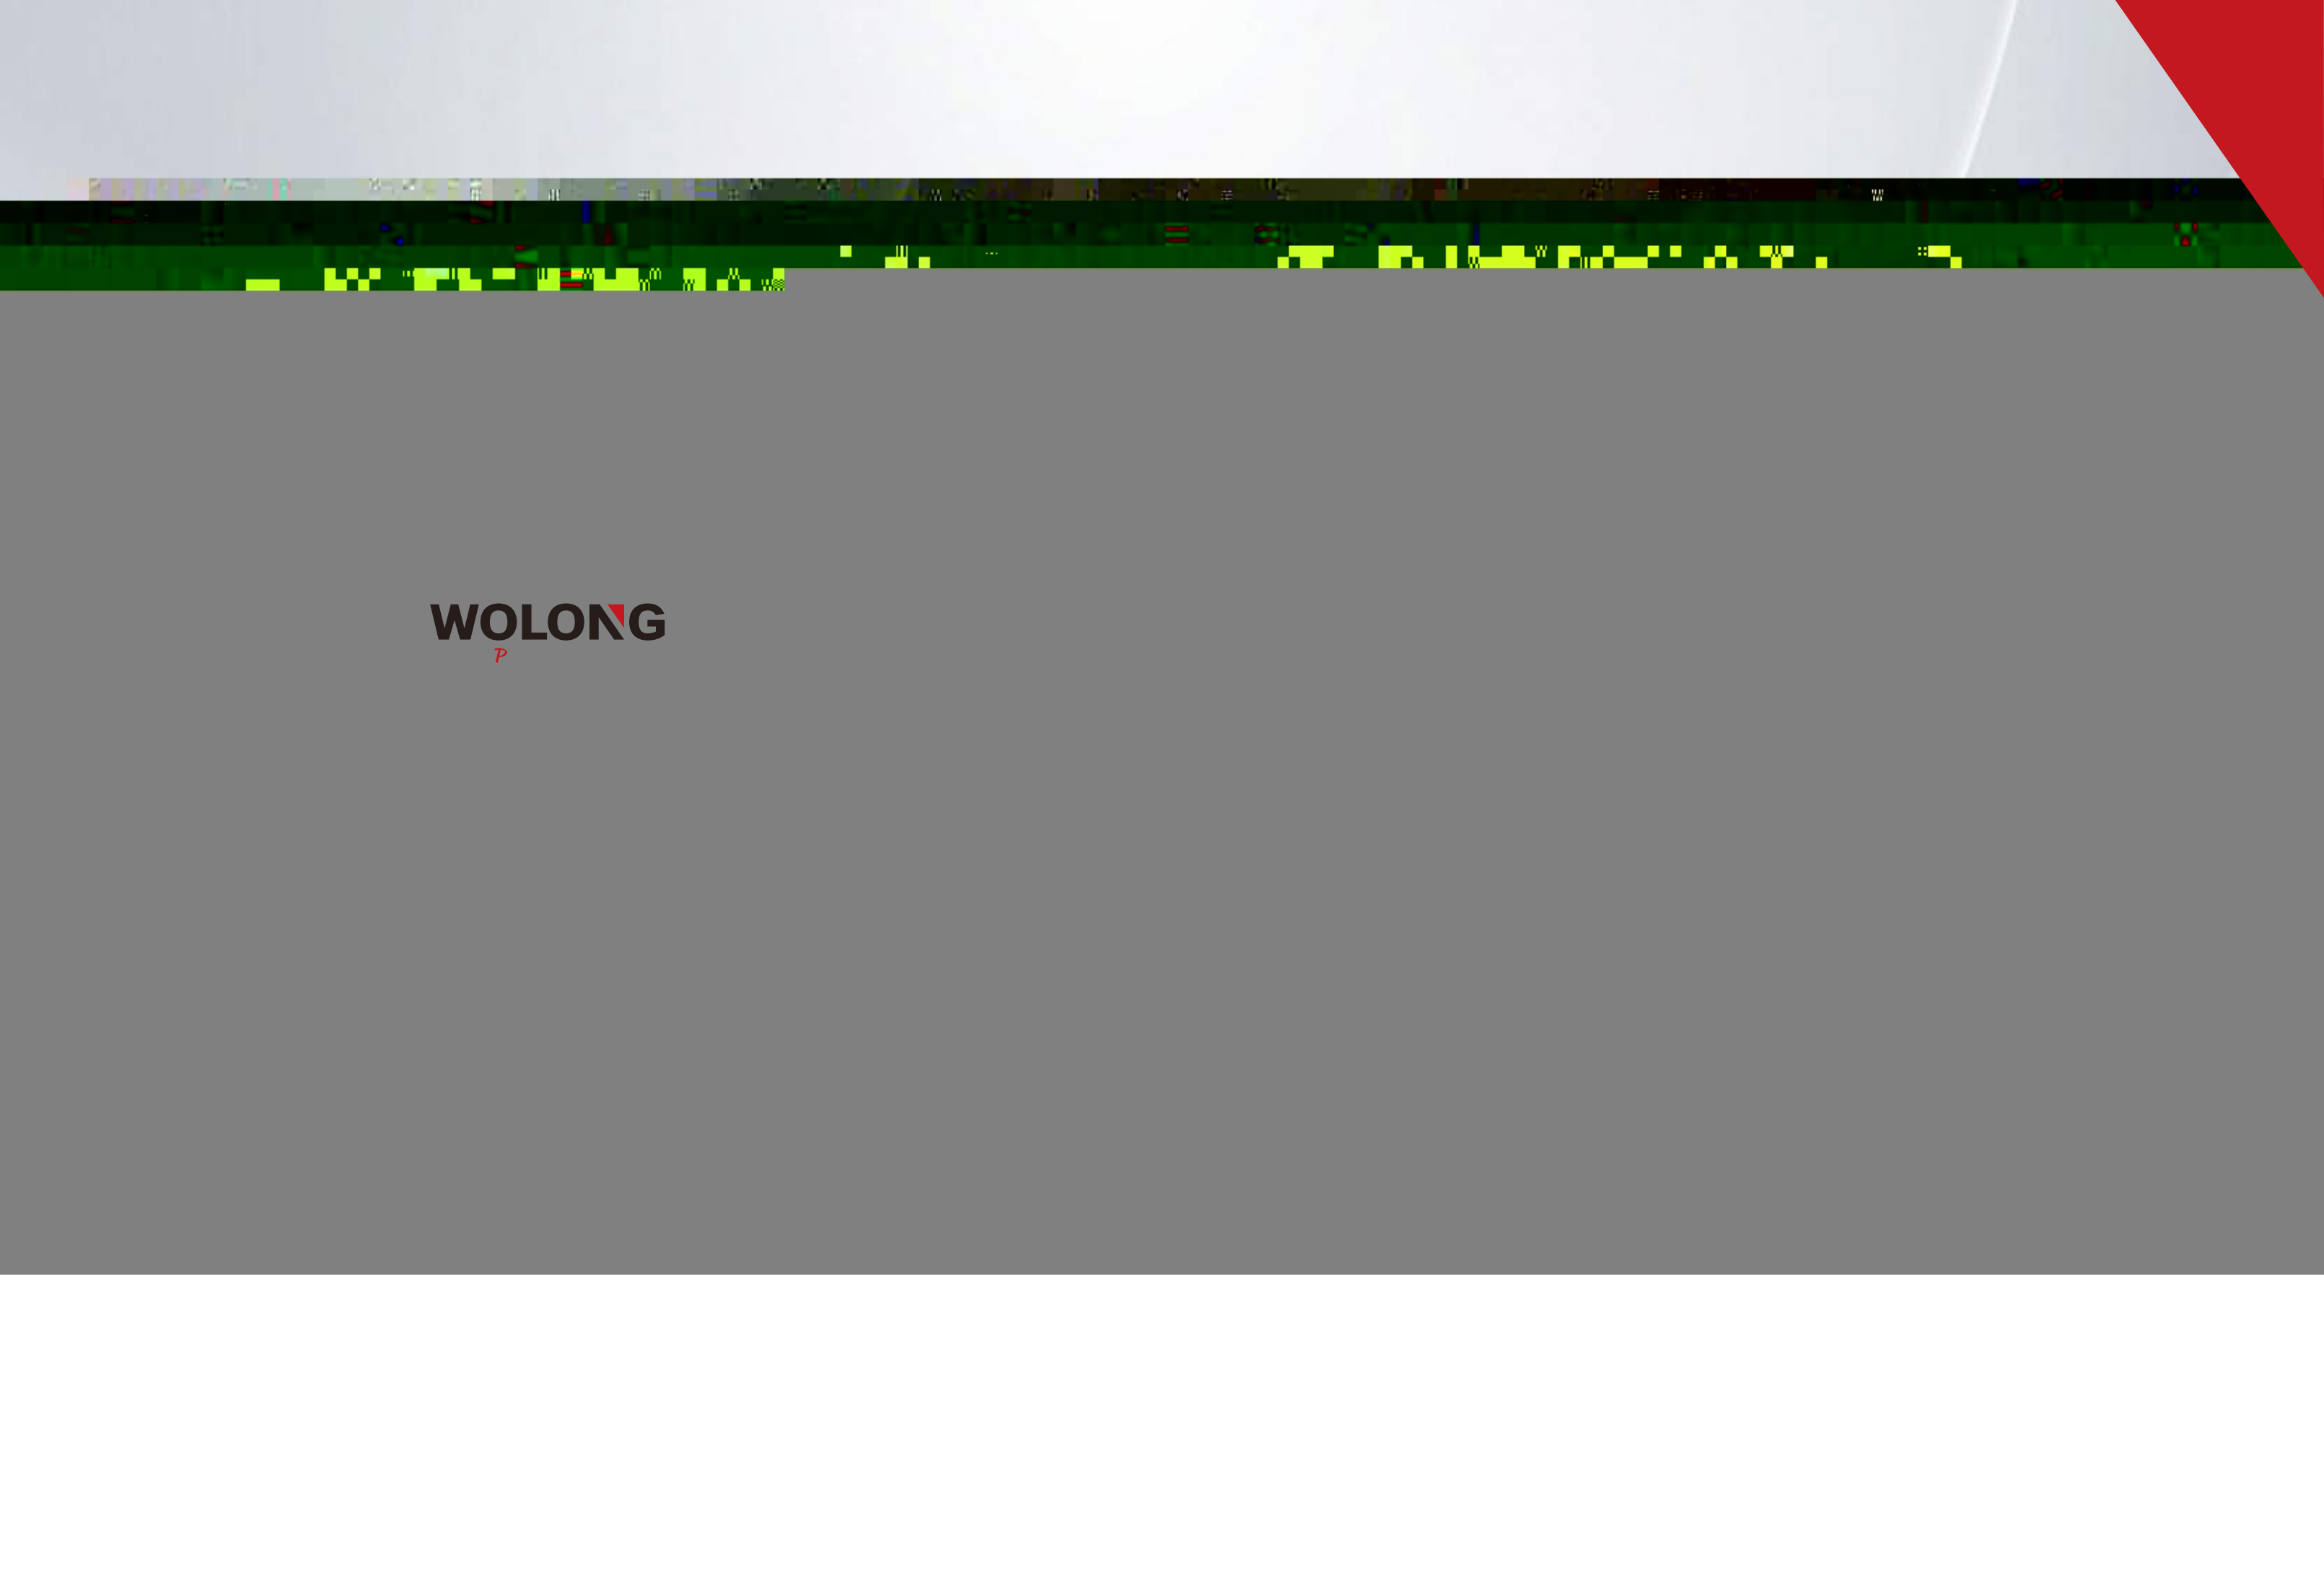

CATALOGUE

|    |                            |    |                             |
|----|----------------------------|----|-----------------------------|
| 01 | COMPANY PROFILE            | 03 | PRODUCT OVERVIEW            |
| 05 | PRODUCT ADVANTAGE          | 10 | PERFORMANCE PARAMETER       |
| 11 | OTHER TECHNICAL PARAMETERS | 12 | OPTIONAL MODEL              |
| 13 | KEYBOARD BASE OPENING SIZE | 14 | NAMING SPECIFICATION        |
| 17 | OUTLINE DIAGRAM            | 19 | TERMINAL CONNECTION DIAGRAM |

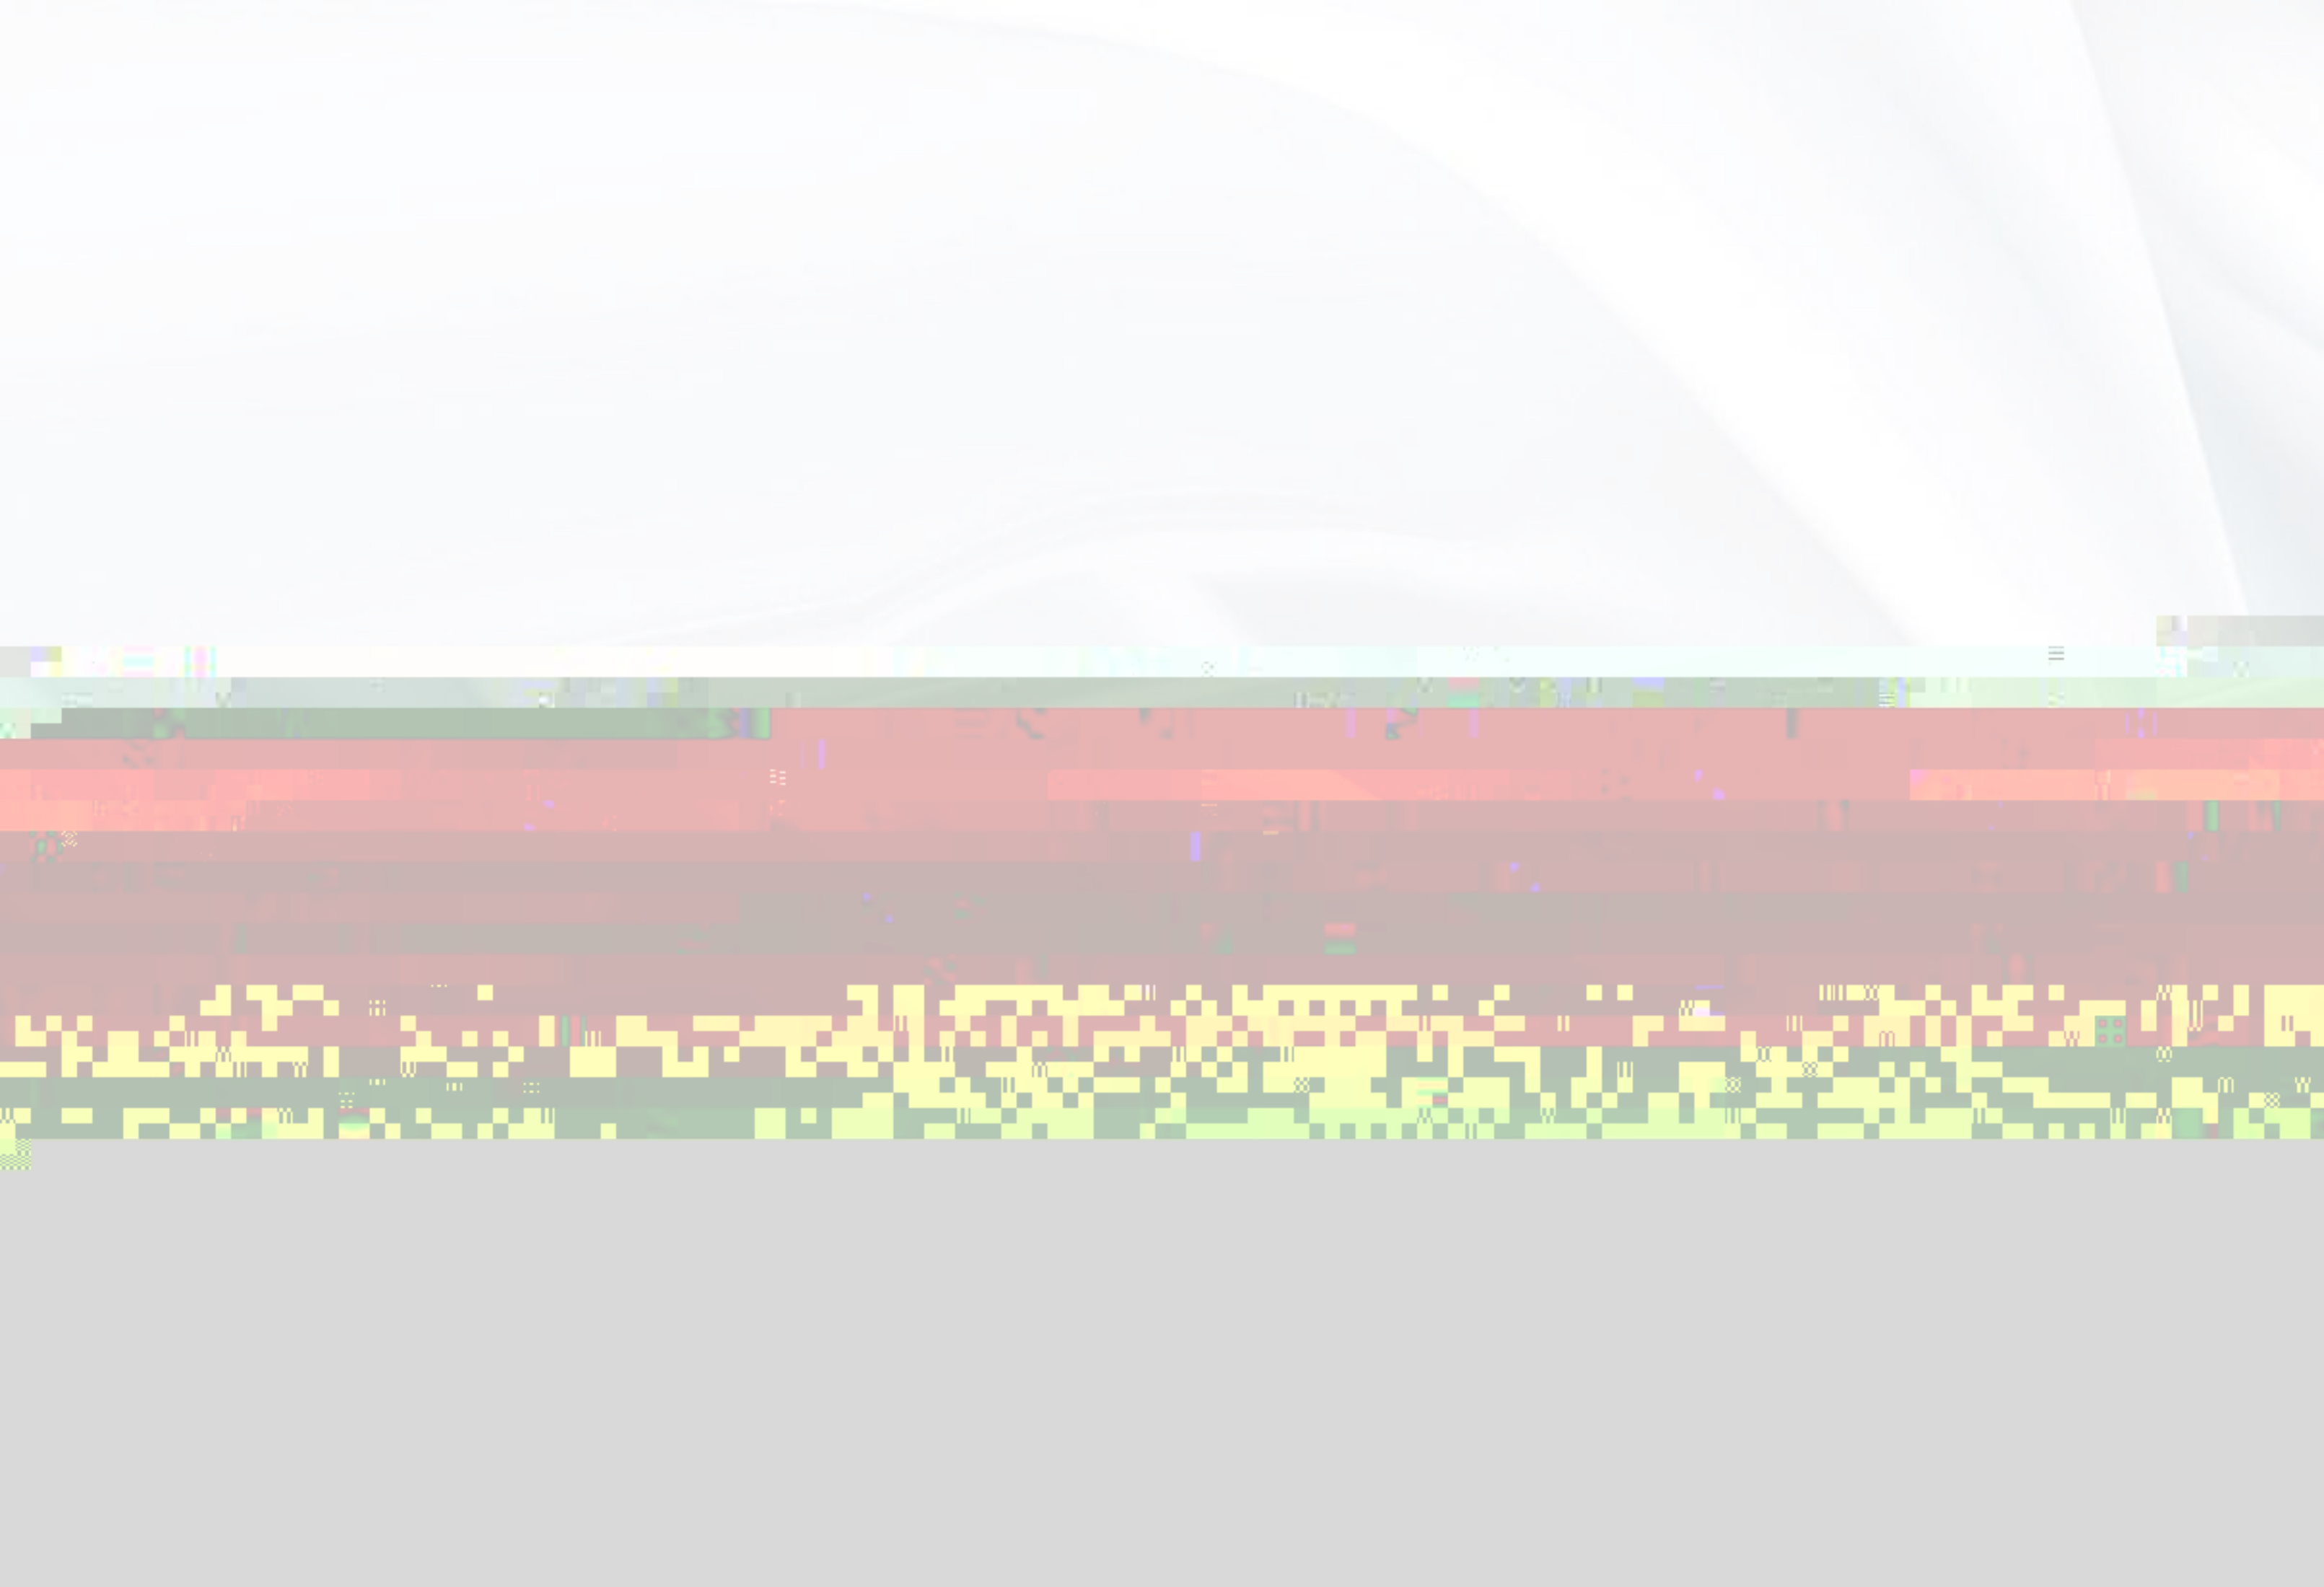

PRODUCT OVERVIEW




185000

WOLONG


CE T L EAC

Å i E

SCOPE OF APPLICATION

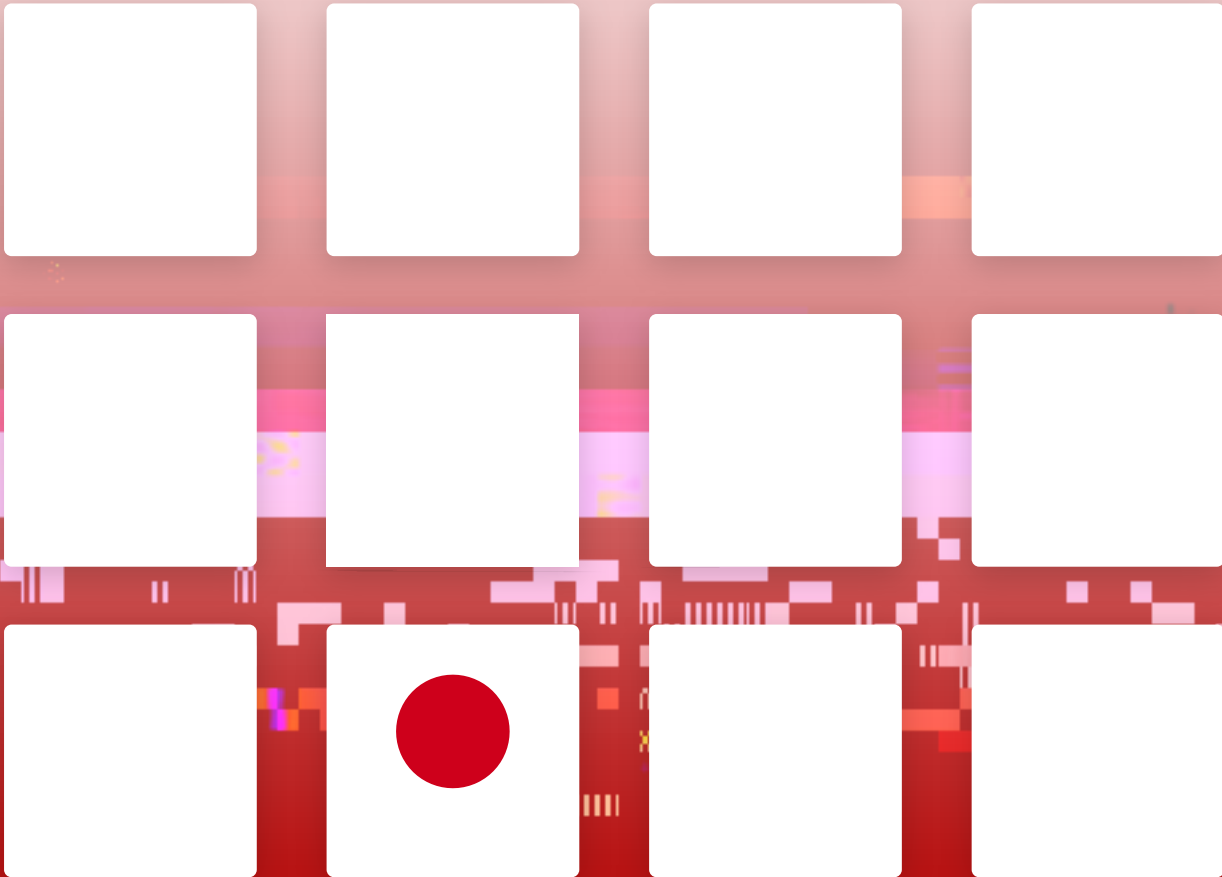


PRODUCT ADVANTAGE

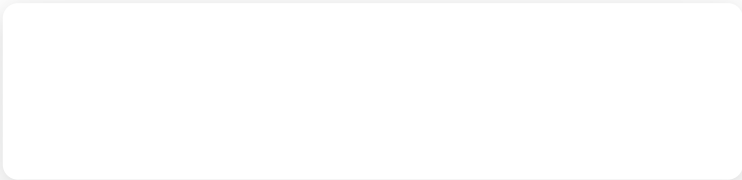


CANopLn

ΔοΧΙΙΦΘ-DΔοΧnΛΠ

ABø (

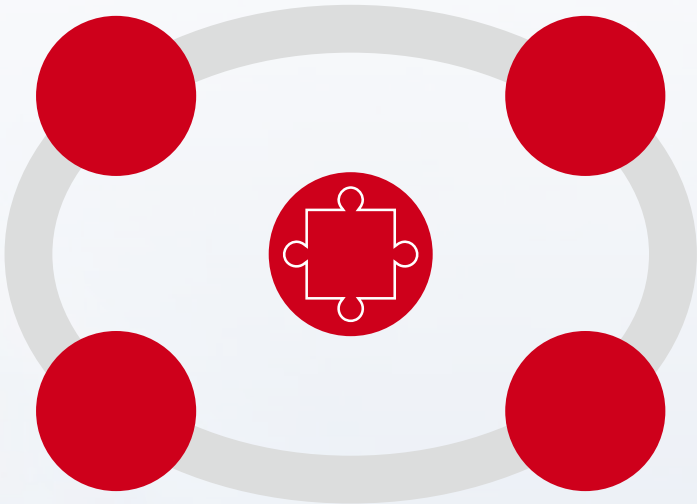

IE  
Δι

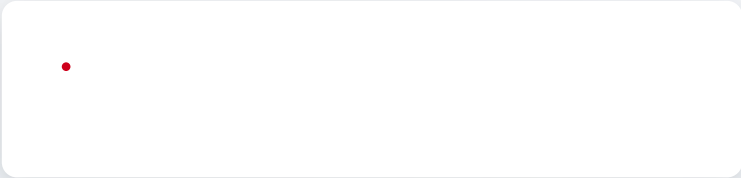


ΜοΙΙΦΘ ΔοΧΙΙΦΘ-DΔοΧnΛΠ  
CANopLn ΕηηΛΔCAi  
ΕηηΛΔnΛΠ

) (




|  | é- é - -                                      |      |
|--|-----------------------------------------------|------|
|  | é- é - -                                      |      |
|  | é- é - -                                      |      |
|  | é- é - -                                      |      |
|  | Hø                                            |      |
|  | Kê- Kê                                        |      |
|  |                                               |      |
|  |                                               |      |
|  | Al ( - é - mA - mA) Al ( - é - mA - mA)       |      |
|  | AE ( - é - mA - mA) AE ( - é - mA - mA) (     | AE ) |
|  | kHú k                                         |      |
|  |                                               | mA   |
|  |                                               | kHú  |
|  |                                               |      |
|  | ìA N£ ìB NC ìC CM                             |      |
|  | ìB N£ ìC CM ( )                               |      |
|  |                                               |      |
|  |                                               |      |
|  | À£ì À£ì                                       |      |
|  | I £                                           |      |
|  | %À£FIBÑÀ-D% %À£FINEì ÈñhLúnL ÈñhLCAì CANopl'n |      |
|  |                                               |      |
|  | %ì %ì                                         |      |
|  | LED                                           |      |
|  | LCD                                           |      |
|  | - kê                                          |      |
|  | - kê                                          |      |
|  | kê                                            |      |
|  | kê                                            |      |
|  |                                               |      |
|  |                                               |      |
|  |                                               |      |
|  | IP20                                          |      |
|  | -                                             |      |
|  | -                                             |      |
|  | IEC - - GB                                    |      |
|  | IEC -                                         |      |

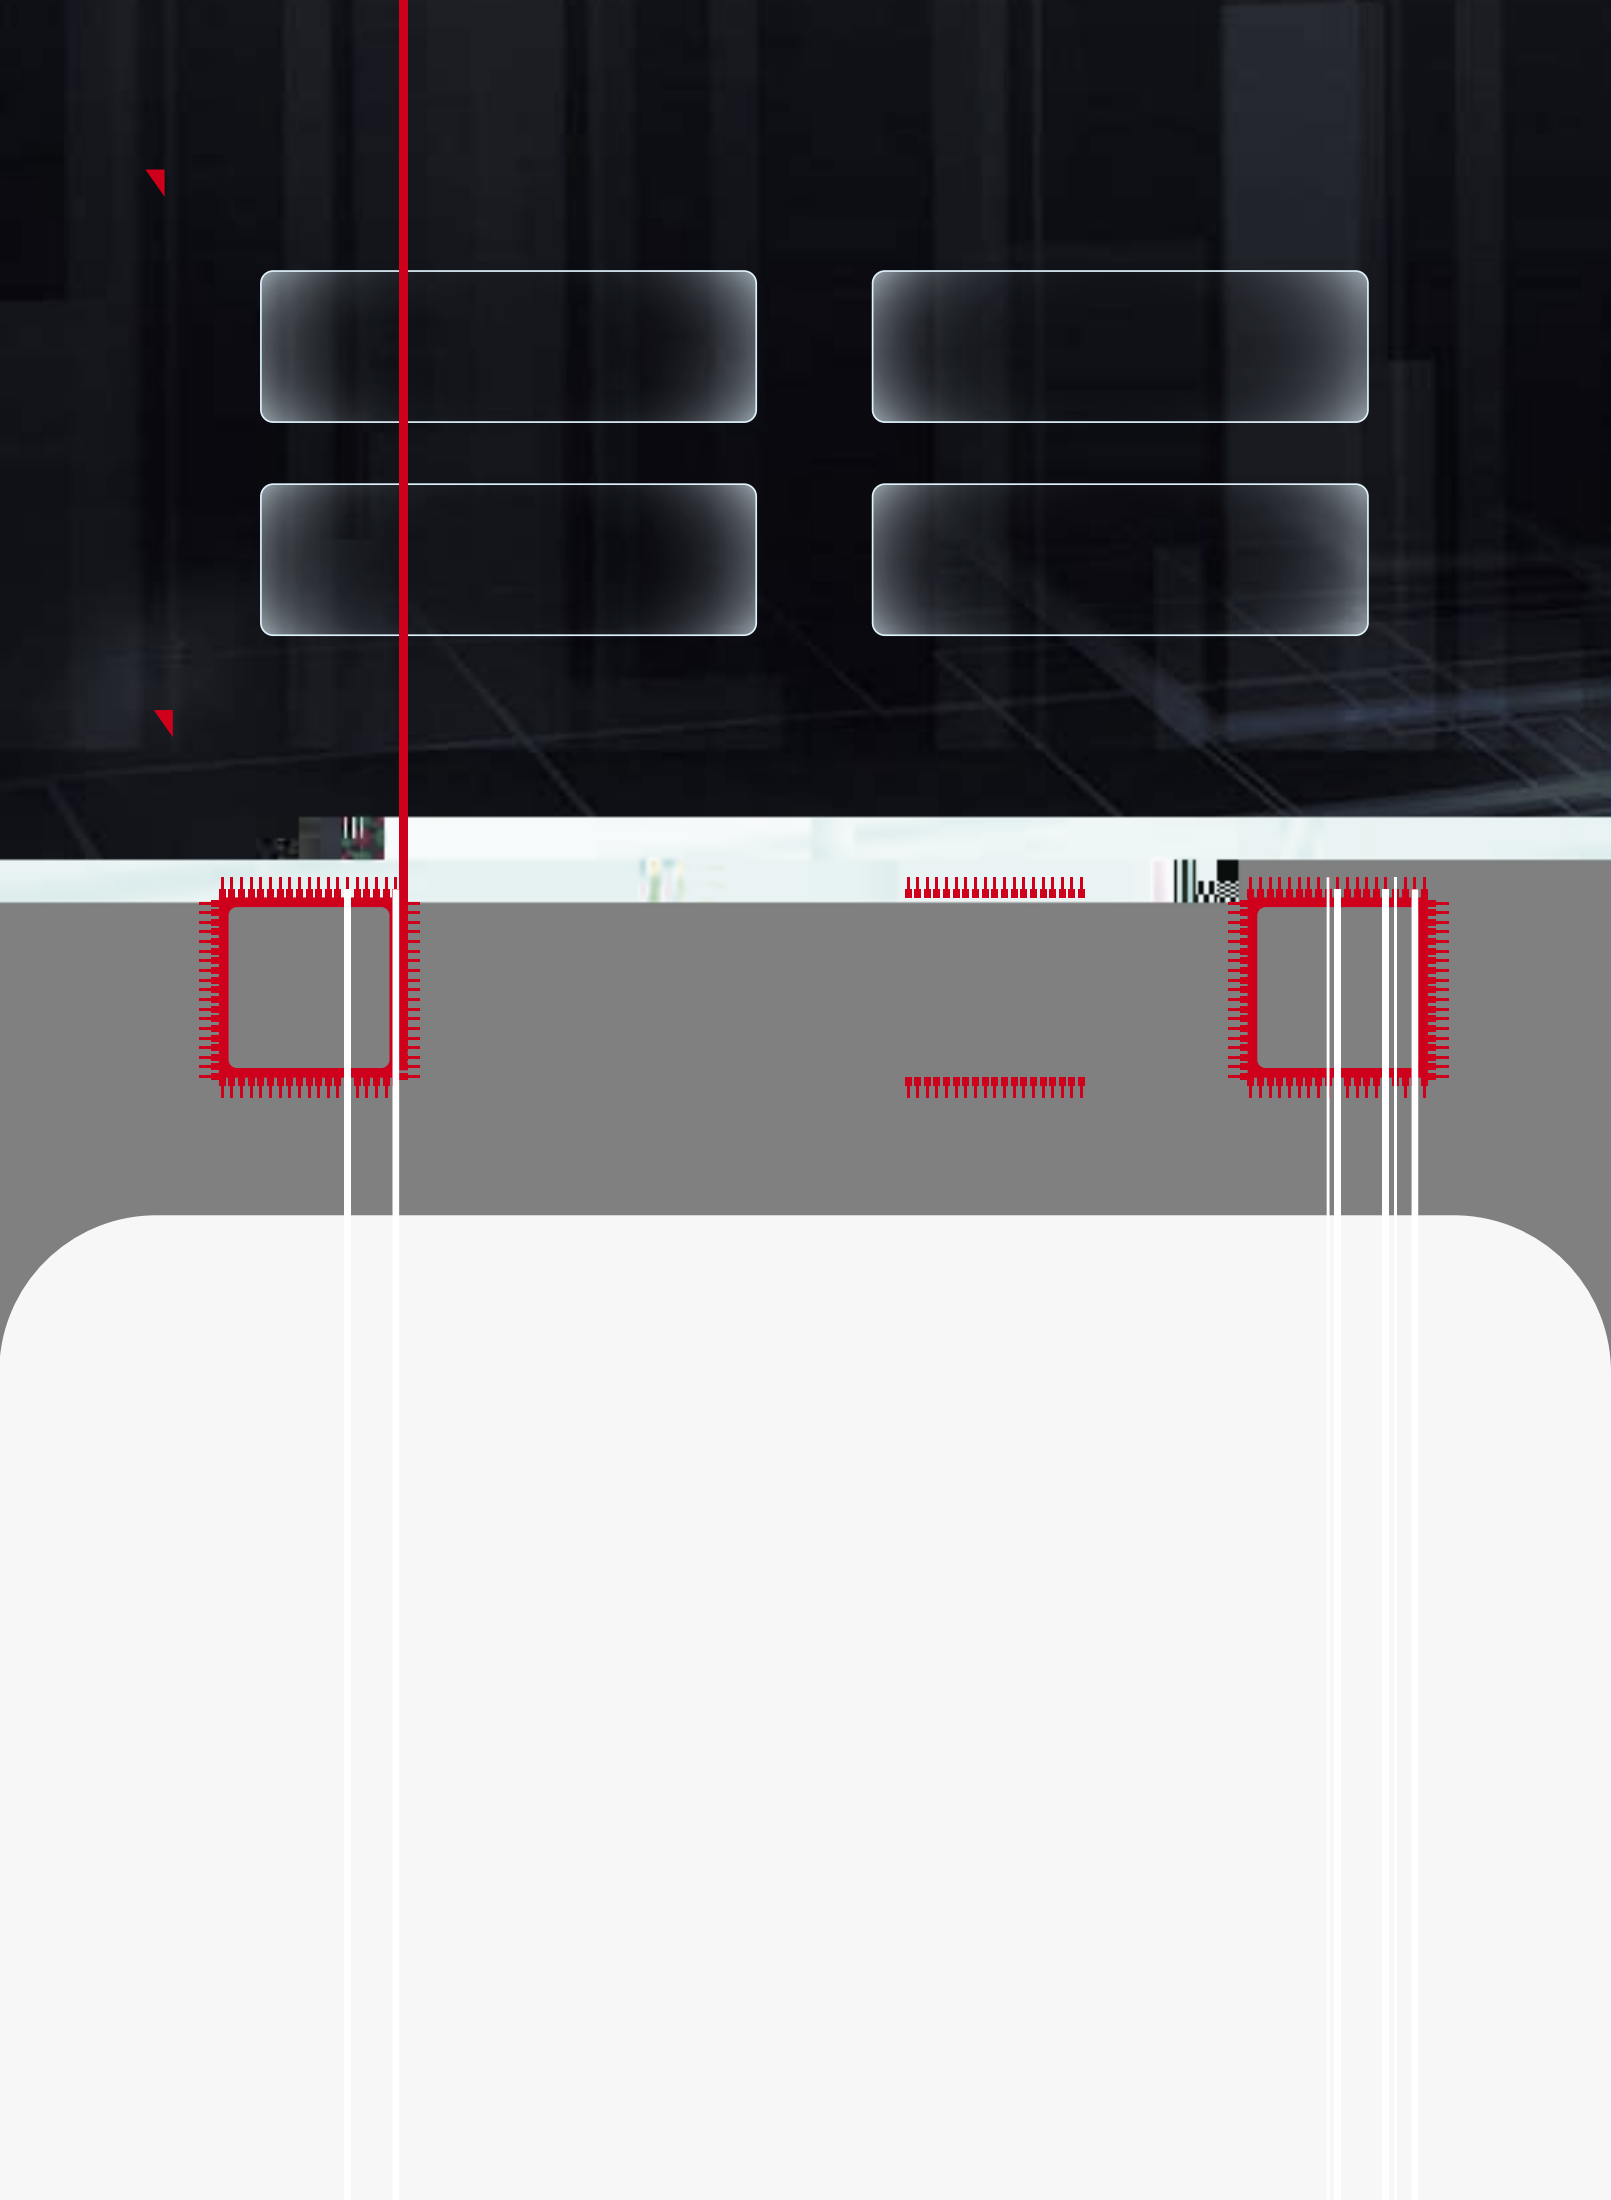


## NAMING SPECIFICATION

WD400 -T3 -011G -B

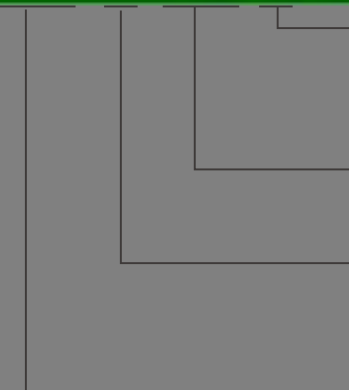

B-  
- k ê  
k ê  
- k ê  
G-- k ê  
-  
Â- ì-  
- é - é - é - é - é  
ê D

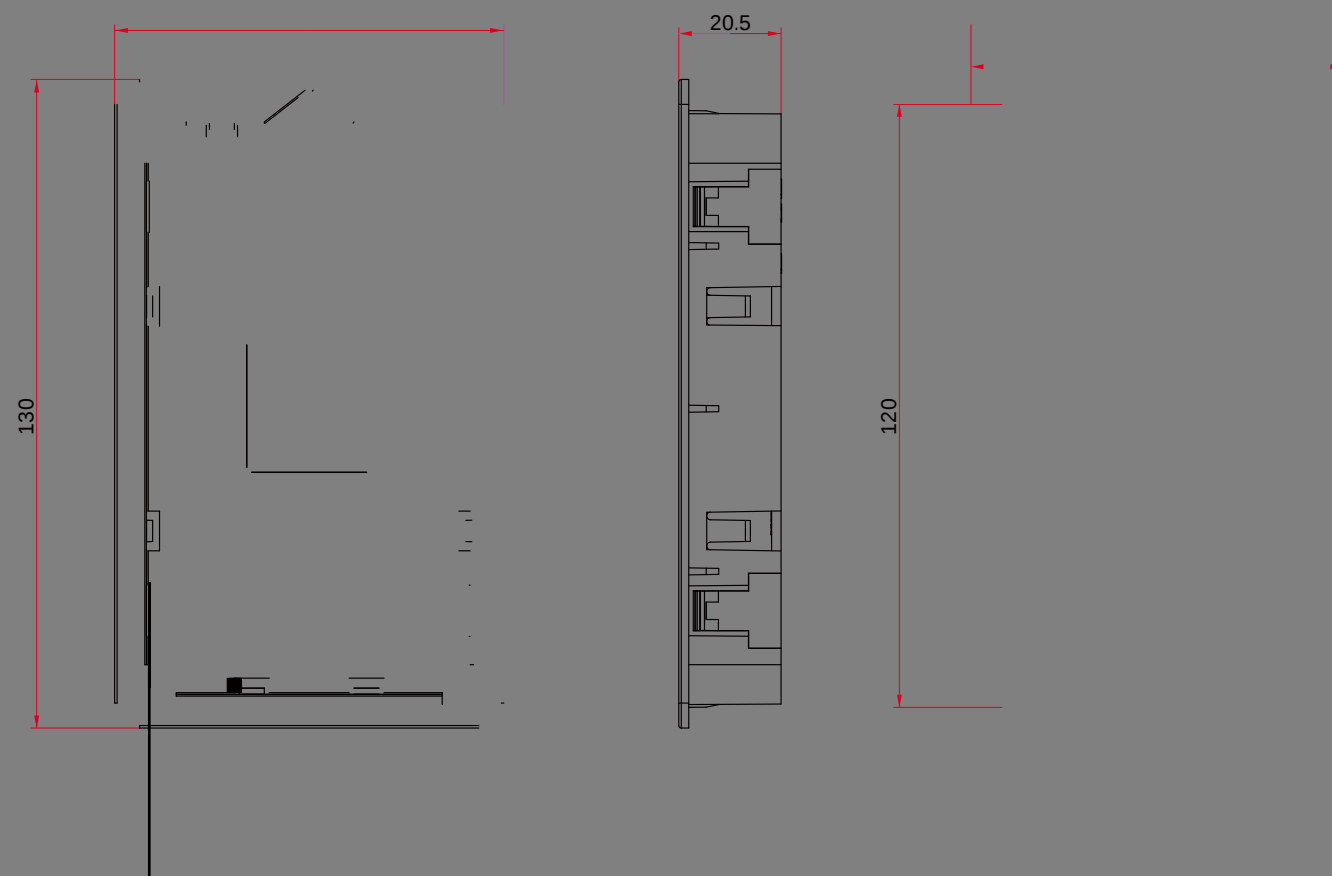

|  |     |    |    |    |      |                 | W1  | D1  | H1  | W2 | H2  |      |   |
|--|-----|----|----|----|------|-----------------|-----|-----|-----|----|-----|------|---|
|  | kW  | HP | A  | A  | A    |                 | mm  | mm  | mm  | mm | mm  |      |   |
|  |     | 1  |    | 4  | 6    | ê D - Å - Á G-B |     | 155 | 200 | 65 |     | - Ø5 | 1 |
|  | 1.5 | 2  | 14 |    | 10.5 | ê D - Å - Á G-B |     | 155 | 200 | 65 |     | - Ø5 |   |
|  | 2.2 | 3  | 20 | 10 | 15   | ê D - Å - Á G-B | 100 | 155 | 242 |    | 232 | - Ø5 | 2 |
|  | 4   | 5  | 32 | 16 | 24   | ê D - Å - G-B   | 100 | 155 | 242 |    | 232 | - Ø5 |   |


|  |      |     |      |     |      |                 | W1  | D1  | H1  | W2  | H2  |       |   |
|--|------|-----|------|-----|------|-----------------|-----|-----|-----|-----|-----|-------|---|
|  | kW   | HP  | A    | A   | A    |                 | mm  | mm  | mm  | mm  | mm  | mm    |   |
|  | 0.75 | 1   |      | 4   |      | WD400-T2-R75G-B | 80  | 155 | 200 |     | 190 | 3-Ø5  |   |
|  | 1.5  | 2   | 9    | 7   | 10.5 | WD400-T2-1R5G-B | 80  | 155 | 200 |     | 190 | 3-Ø5  |   |
|  | 2.2  | 3   | 11.4 | 10  | 15   | WD400-T2-2R2G-B | 100 | 155 | 242 | 84  | 232 | 4-Ø5  | 2 |
|  | 4    | 5   |      |     | 24   | WD400-T2-004G-B | 100 | 155 | 242 | 84  | 232 | 4-Ø5  |   |
|  | 5.5  | 7.5 | 32.2 | 20  | 30   | WD400-T2-5R5G-B |     | 175 | 320 | 98  | 308 | 4-Ø   | 3 |
|  | 7.5  | 10  | 41.3 | 30  | 45   | WD400-T2-7R5G-B | 142 | 225 | 383 | 120 | 372 | 4-Ø   | 4 |
|  | 11   | 15  | 59   | 42  |      | WD400-T2-011G-B | 142 | 225 | 383 | 120 | 372 | 4-Ø   |   |
|  | 15   | 20  | 57   | 55  | 82.5 | WD400-T2-015G-B | 170 | 225 | 430 | 150 |     | 4-Ø   | 5 |
|  | 18.5 | 25  |      | 70  | 105  | WD400-T2-018G-B | 170 | 225 | 430 | 150 |     | 4-Ø   |   |
|  | 22   | 30  | 89   | 80  | 120  | WD400-T2-022G-B | 170 | 225 | 430 | 150 |     | 4-Ø   |   |
|  | 30   | 40  |      | 110 |      | WD400-T2-030G   | 240 | 310 |     |     | 545 | 4-Ø7  | 6 |
|  | 37   | 50  | 139  | 130 | 195  | WD400-T2-037G   | 240 | 310 |     |     | 545 | 4-Ø7  |   |
|  | 45   |     |      |     | 240  | WD400-T2-045G   | 240 | 310 |     |     | 545 | 4-Ø7  |   |
|  | 55   | 75  |      | 200 | 300  | WD400-T2-055G   | 270 | 350 |     | 195 |     | 4-Ø10 |   |



G:

h

Rated power

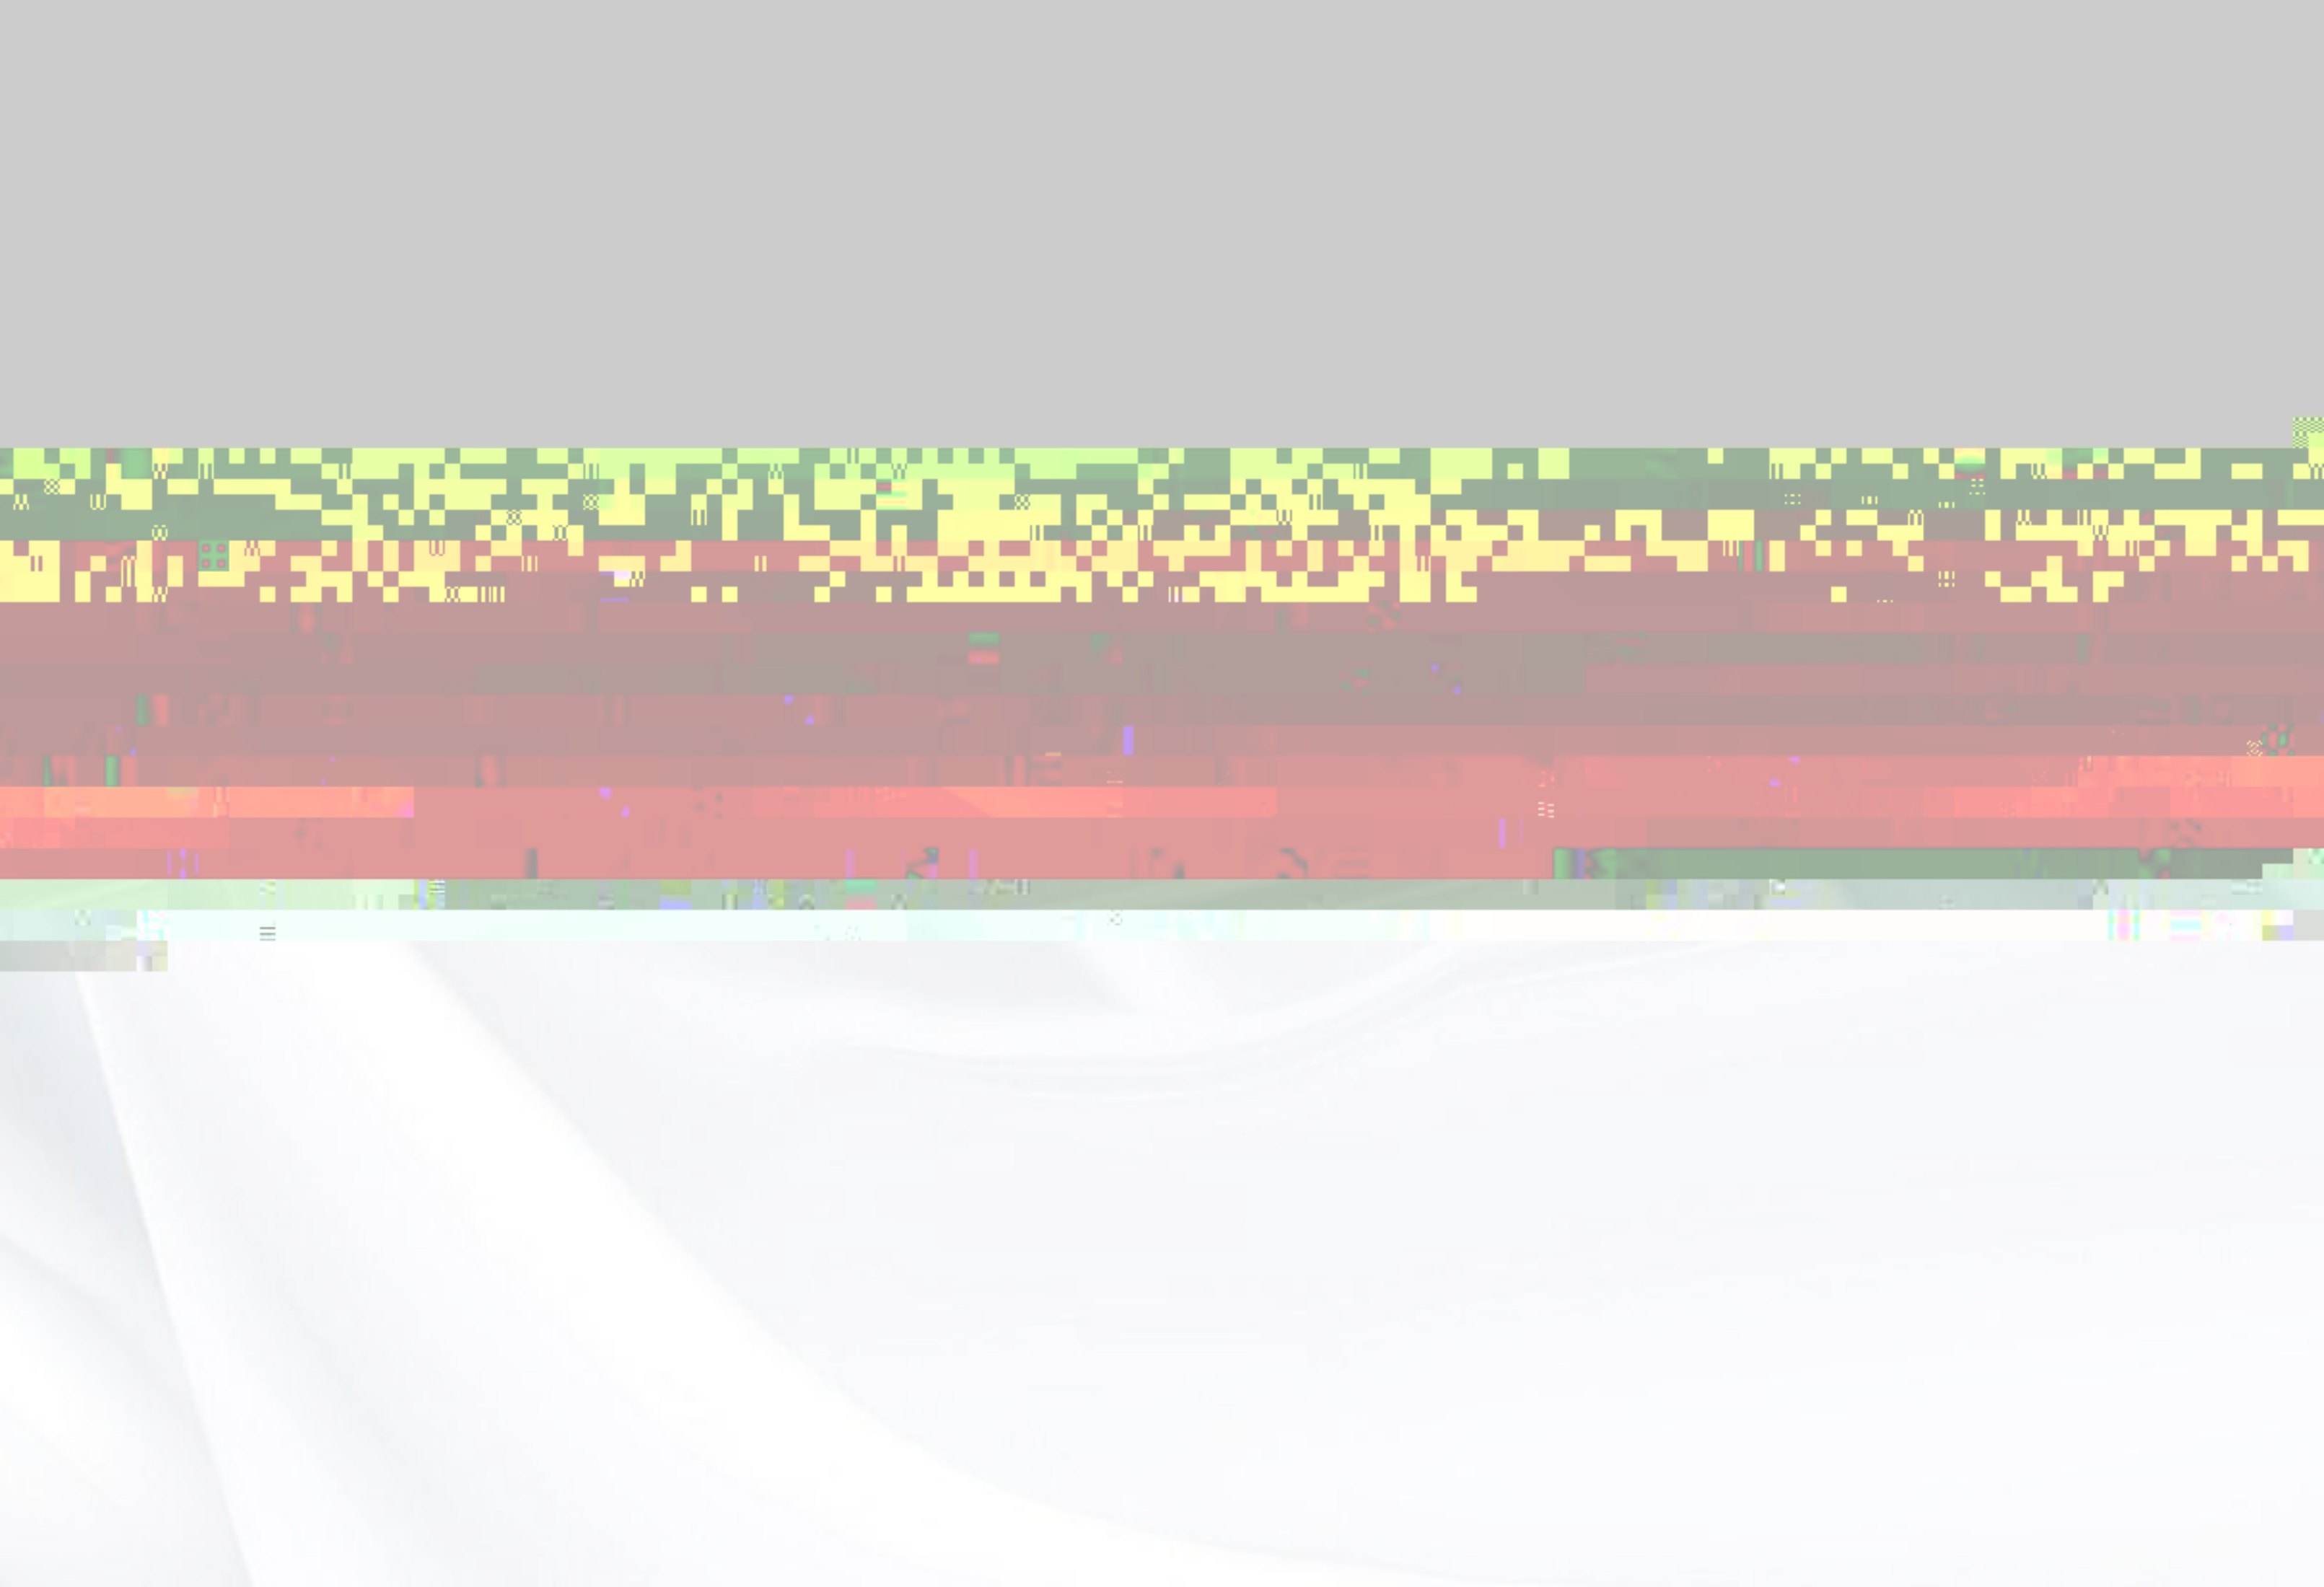

TERMINAL CONNECTION DIAGRAM

